



(43) International Publication Date
21 July 2005 (21.07.2005)


PCT

(10) International Publication Number
WO 2005/067072 A1

- (51) International Patent Classification⁷: **H01L 41/09**
- (21) International Application Number:
PCT/GB2005/000037
- (22) International Filing Date: 7 January 2005 (07.01.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0400342.2 8 January 2004 (08.01.2004) GB
- (71) Applicant (for all designated States except US): **THORLABS, INC.** [US/US]; 435 Route 206 North, Newton, NJ 07860 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **DIXON, Michael, John** [GB/GB]; Ash Tree Farm, "A" Furlong Drove, Little Downham, Ely, Cambridge CB6 2EW (GB). **DHESE, Keith, Allen** [GB/GB]; 51 Old School Lane, Milton, Cambridge, Cambridgeshire CB4 6BS (GB).
- (74) Agent: **HAINES, Miles, John**; D Young & Co., 121 Holborn, London EC1N 2DY (GB).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: **PIEZOELECTRIC POSITIONER**

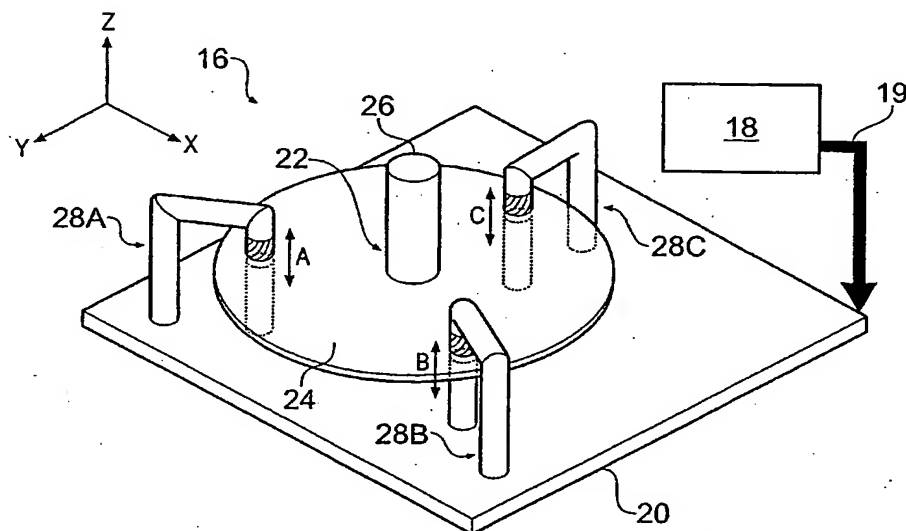

(57) Abstract: A multi-axis piezoelectric positioner (16, 36, 56, 116) is described. The positioner comprises a fixed part (20, 60, 120) which may be moved relative to a moveable part (22, 62, 122) in a plane. The moveable part comprises a piezoelectric device (24, 64A-D; 66A-D, 124), which is arranged so that it may expand and contract within the plane. The moveable part may be selectively clamped in position relative to the fixed part at first, second and third locations by corresponding first, second and third releasable clamp mechanisms (28A-C, 34A-C, 63A-D, 128A-C). The moveable part may thus be moved in the plane relative to the fixed part by selected activation of ones of the releasable clamp mechanisms while the piezoelectric device is expanded or contracted. This provides for a parallel-mechanism multi-axis piezoelectric positioner. A carrier can be provided which may be positioned along a direction perpendicular to the plane to provide for a three-axis positioner.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.